


User Manual


Pressure • Temperature • Humidity • Air Velocity • Airflow • Sound level

KIRAY 50 Infrared thermometer



Distance from the target

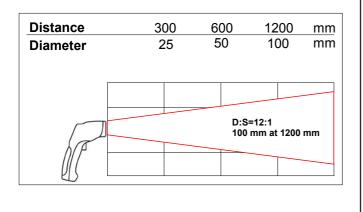

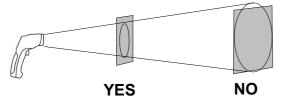


Make sure that the target is larger than the size of the laser sighting.

Infrared thermometer **KIRAY 50** is a key tool to diagnose, inspect and check any temperature, with the advantage of using "no-contact" technology. You can safely measure surface temperatures of hot objects, dangerous or difficult to access. Perfect tool to take temperature in a house, a garage, a workshop, an office, a car, a kitchen etc...

Technical features

Spectral response Optical Temperature range Accuracy*	D.S : 12:1 (100 mm at 1200 mm) From -50 to +380°C From -50 to -20°C : ±5°C From -20 to +380°C : ±2% of reading
	or ±2°C
Display resolution	
Response time	
Emissivity	
	LCD will show : «HI » / « Lo »
Laser sighting	Wave length : from 630 nm to 670 nm
	Output < at 1mW, Class 2 (II)
Indication of positive or	
negative temperature	Automatic (no indication for a
	positive temperature)
	(-) sign for a negative temperature
Screen	4 digits with LCD backlighted screen
	Automatic after 10 seconds of inactivity
Power supply	
	100 h (inactive laser and backlight)
	30 h (active laser and backlight)
Use temperature	
Storage temperature	
	From 10 to 90%RH in operating mode and
Relative humany	lower than 80%RH in storage
Dimensions	
Weight	i / u g (included ballery)

*Accuracy for an ambient temperature from 18 to 28°C (with a relative humidity lower than 80% RH)



- 1 Technical unit °C/°F
- 2 Low battery indicator
- 3 Temperature value
- 4 MAX/MIN value indicator
- 5 Current measurement indicator
- 6 HOLD indicaeur (fixed measurement)
- 7 Laser in operation indicator
- 8 Emissivity value = 0.95 (fixed value)

KIRAY 50 instrument buttons



1 - **MAX/MIN button :** It allows to display maximum and minimum values during a measurement.

2 - **Backlight button :** It allows to activate or deactivate LCD backlight.

3 - Laser button : It allows to activate or deactivate the laser.


4 - **Technical unit button :** It allows to choose measurement unit : °C or °F.

5 - Trigger : it allows to measure temperatures.

Press the trigger : **« scan »** is indicated on the top left of the screen. Release it, **« hold »** is indicated on the top left of the screen and the last measurement is displayed. Device automatically shut off after 10 of inactivity.

Infrared thermometer, how does it works?

Infrared thermometers can measure the surface temperature of an object. Its optic lens catches the energy emitted and reflected by the object. This energy is collected and focused onto a detector. This information is displayed as temperature. The laser pointer is only used to aim at the target.






CE certification

This device meets with following standards' requirements.

• EN 50081-1 : 1992, Electromagnetic compatibility, Part 1 • EN 50082-1 : 1992, Electromagnetic compatibility, Part 2

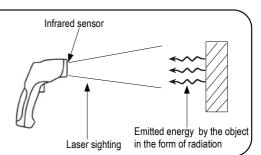

www.kimo.fr



Distributed by :